

# C4350Z-L4




## Features

- Onboard Intel®Celeron J4125 2.0GHz quad Core CPU
- 1\* SODIMM RAM slot, 2400MHz DDR4, up to 8GB
- 1\*HDMI display output
- 4\*Intel I225 Gigabit Ethernet, support WOL/PXE
- 2\*RS232 DB9 COM port, COM2 RS485
- 1\* 6pin Phoenix Connector (include 2-in 2-out GPIO)
- 4\*USB3.0, 1\* internal USB2.0 dongle
- DC 12V power input
- Fanless cooling, full aluminum case
- 1\* SIM slot

## Specification

Model No.	C4350Z-L4	
Case	Material/Structure	Full aluminum alloy, fanless design
	Color	Black
	Dimension	141.5*126*56.5MM
	Installation	Desktop / Wall-mount
Motherboard	CPU	Onboard Intel®Celeron J4125 2.0GHz quad Core 4 thread processor, TDP 10W
	Chipset	SOC
	Graphics	Integrated Intel® UHD Graphics 600
	Memory	1* SODIMM DDR4 RAM slot, 2400MHz, up to 8GB
Front I/O Port	POWER	1*Power switch, 1*Reset switch
	LED	1*P.LED, 1*H.LED
	AC LOSS	1*AC LOSS (auto power ON/OFF)
	Display	1*HDMI port, 4096X2160@30Hz)
	USB	2* USB2.0 port, 2* USB3.0 port, 1*internal USB2.0 dongle
	SIM	1* SIM slot
Rear I/O Port	LAN	4* RJ45 Gigabit LAN port, Intel I225 Gigabit Ethernet, support Wake On LAN/PXE
	GPIO	1* 6pin Phoenix connector (2-in 2-out GPIO, 1pin VCC, 6pin GND)
	COM	2* RS232 DB9 COM port, COM2 support RS485 selectable
	Power	1* 12V DC_In Jack
Storage	SATA	1*2.5" SATA hard disk expansion
	MSATA	1* MSATA slot, support Intel protocol SSD, transfer rate up to 6Gbps.
Expansion	Mini PCIE	1* Mini-PCIE slot, support 4G module
	M.2	1* M.2 slot, support M.2 2242 WiFi module
OS Support	Microsoft Windows	Windows 10/11 IoT
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
Power Supply	Power Supply	External power adaptor
	Voltage Input	DC 12V
	Power Output	AC TO DC, 36W / 60W
Environment	Working Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating

## Dimension

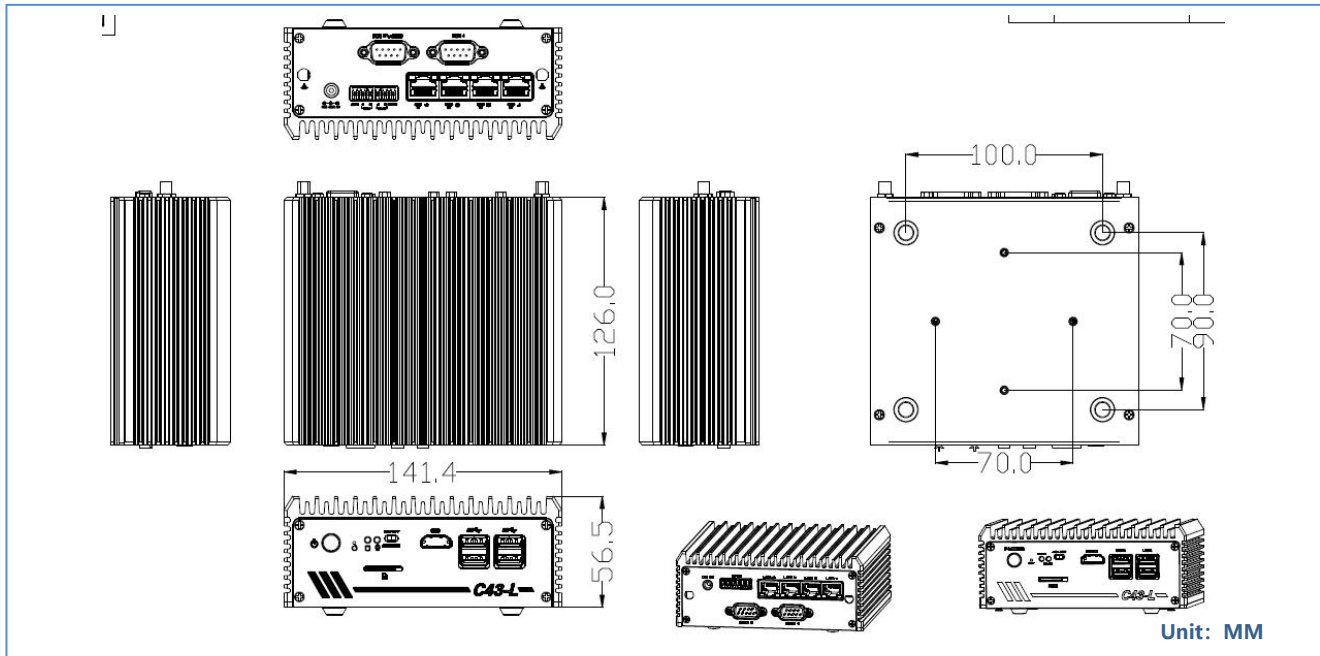

Front I/O View



Rear I/O View



## Order Information

No.	Model	Processor	Motherboard	Memory	GPIO	LAN	COM	HDMI	VGA	DP	USB2.0	USB3.0	SIM	power-input
1	C4350Z-L4 V1.0(J4125)	J4125 /2.0GHz	R41V+R36F-C2	1*DDR4	2-in 2-out	4*1225	2	1	N/A	N/A	2	2	1	DC 12V