



# C4350Z-V



## Features

- Onboard Intel®Celeron J6412, 2.00 GHz
- 2\*DDR4 SODIMM RAM slot, 2400MHz, up to 8GB
- 1\*VGA, 1\*HDMI dual independent display
- 2\*RTL8111HS Gigabit Ethernet, support WOL、 PXE
- 2\*RS232 (2\*RS485 selectable), support the 9th pin charged function,
- 4\*USB 3.0, 4\*USB2.0
- 1\*12V DC\_In Jack
- Fanless design, full aluminum case
- 1\* SIM slot

## Specifications

Model	C4350Z-V	
No. Case	Material/Structure	Full aluminum case, fanless cooling
	Color	IronGray
	Dimension(L*W*H)	141.5*126*56.5MM
	Installation	Desktop/Wall-mount
Motherboard	CPU	Onboard Intel® Celeron J6412, 2.00 GHz
	Chipset	SOC
	Graphics	Integrated Intel®UHD Graphics 600, support DirectX 12/Open GL4.4, support 4K
	Memory	2*DDR4 SODIMM RAM slot, 2400MHz, up to 8GB
Front I/O Port	POWER	1*Power switch, 1*Reset switch
	LED	1*P.LED, 1*H.LED
	AC/LOSS	1*AC/LOSS switch (Auto power ON/OFF)
	USB	2*USB 2.0 port, 2*USB3.0 port
	Audio	1*Line out port, 1*MIC port
	SIM	1*SIM slot, 3G/4G module application
Rear I/O Port	POWER	1*2PIN remote control switch
	Display	1*VGAport, 1*HDMI port(4096x2304@24Hz)
	LAN	2*RJ45 Gigabit LAN port, RTL8111HGigabitEthernet,supportWakeOnLAN、 PXEfunction
	USB	2*USB2.0 port, 2*USB3.0 port
	COM	2*DB9RS232 COM port, support the 9th Pin charged function, 2*RS485/ CAN selectable
	Power	1*12VDC_Inport
Storage	SATA	N/A
	MSATA	1*MSATA slot, support Intel protocol SSD
	M.2	1*M.2 slot, support M.2 2280NV MEPCIE x4 standard SSD
Expansion	Mini PCIE	1*Mini-PCIE slot, support WiFi/4G module
	M.2	1*M.2 slot, support M.2 Key B5G module
OS Support	Microsoft Windows	Windows IoT
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256, 0~255seconds)
Power Supply	Power Type	External power adaptor
	Voltage Input	DC12V
	Consumption	ACTODC、 36W/60W
Environment	Working Temp.	-10°C~60°C
	Storage Temp.	-20°C~70°C
	Relative Humidity	5%-95%relativehumidity,non-condensing
	Working Vibration	0.5grms/5-500HZ/random/operating


## Fanless Embedded System

All product specifications are subject to change without prior notice



## Dimensions

## C4350Z-V

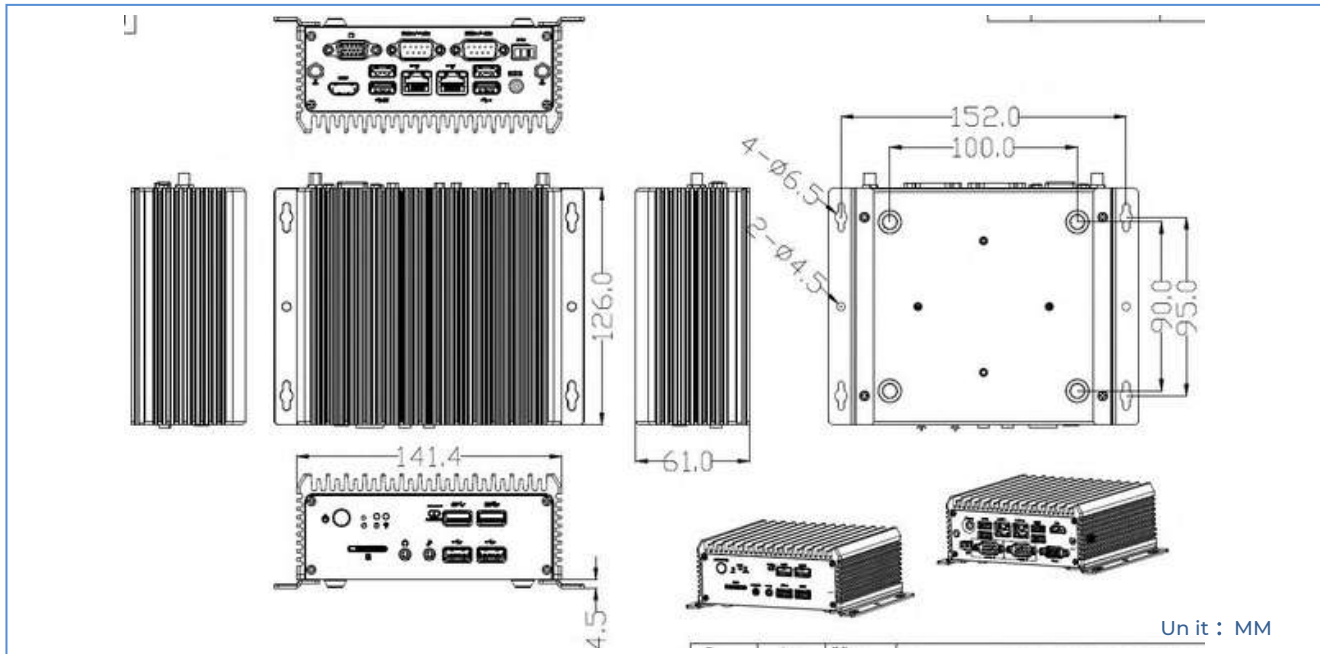

Front I/O View



Rear I/O View



## More CPUs

No.	Model	Processor	Motherboard	IO Board	Memory	LAN	COM	HDMI	VGA	USB2.0	USB3.0	SIM	power
1	C4350S-V V1.0(10210U)	i5-10210U/1.6G	N10_I522H	N81-VGA	2*SODDR4	2*8111H	2	1	1	4	4	1	DC 12V
2	C4350S-V V1.0(8265U)	i5-8265U/1.6G	N08_I522H	N81-VGA	2*SODDR4	2*8111H	2	1	1	4	4	1	DC 12V
3	C4350S-V V1.0(6200U)	i5-6200U/2.3G	N62_I522H	N81-VGA	1*SODDR4	2*I211AT	2	1	1	4	4	1	DC 12V
4	C4350S-V V1.0(5205U)	5205U/ 1.9G	N10_C322H	N81-VGA	2*SODDR4	2*8111H	2	1	1	4	4	1	DC 12V
5	C4350S-V V1.0(J4125)	J4125/2.0G	N41_J122H	N81-VGA	2*SODDR4	2*8111H	2	1	1	4	4	1	DC 12V

## Fanless Embedded System

All product specifications are subject to change without prior notice