



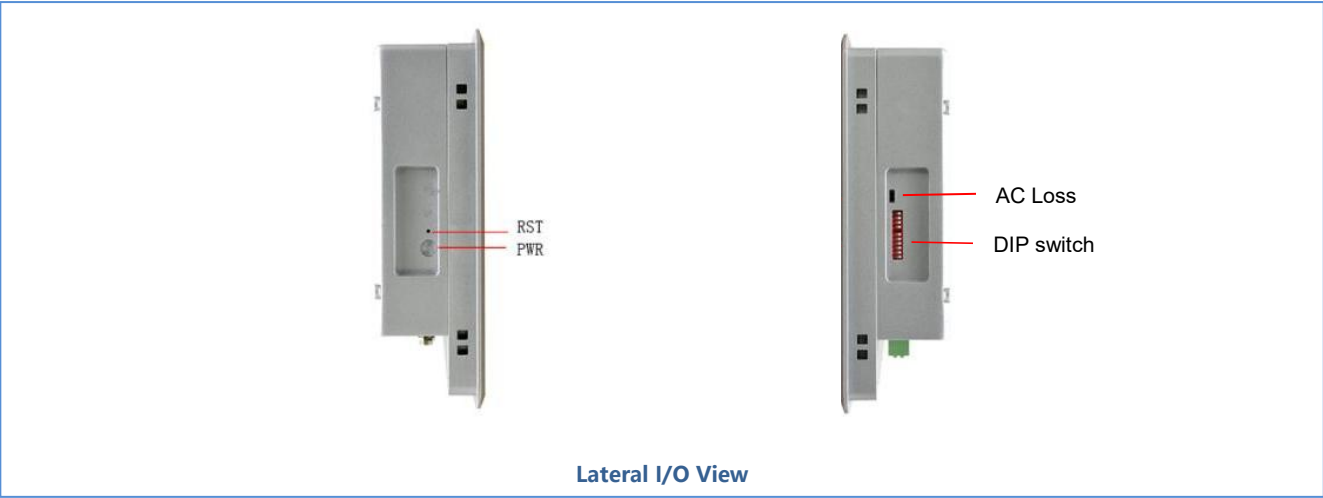


Features

- 10.4" LCD, capacitive touch screen
- Intel® Celeron J16412
- 1*SODIMM DDR3L 1333MHz, up to 8GB
- 1*HDMI
- 2*Intel I210AT Gigabit Ethernet, support WOL、 PXE
- 6*RS232, COM1 DB9 RS232, COM2 DB9 RS232/485/422, COM3-6 RS232/485/422
- 2*15Pin Phoenix connector, include COM3~6, GPIO, switch ,5V, GND
- 1*USB3.0, 3*USB2.0
- 9~36V power input

Model No.	P1071Y-C6 V1.0(J1900)	
Chassis	Material/Structure	Aluminum case, fanless design
	Color	Silver
	Dimension	L272*W214*H62mm
	Net Weight	2.63KG
LCD Screen	Installation	Support VESA/embedded installation
	Type	10.4" LCD
	Resolution	800 * 600
Touch Screen	Luminance	350 cd/m ²
	Type	Capacitive, 10 point touch
Mainboard	Light Transmission	>85%
	CPU	Onboard Intel®Celeron J1900/2.00GHz quad core 4-Thread processor, TDP 10W
	Graphics	Integrated Intel® HD Graphics
IO Port	Memory	1*DDR3L SODIMM 1333MHz RAM slot, up to 8GB
	POWER	1*Power button, 1* reset button, 1*ACLOSS (electric auto power ON/OFF)
	LED	1*Power LED, 1* HDD LED
	Display	1*HDMI1.4
	LAN	2*Intel I210AT Gigabit Ethernet, support Wake On LAN、 PXE
	USB	3*USB3.0, 3*USB2.0
	COM	6*RS232, COM1 DB9 RS232, COM2 DB9 RS232/485/422, COM3-6 RS232/485/422 on
	Phoenix Connector	2*15pin Phoenix connector, COM1-2 support pin9 charged function
	DIP switch	2*15Pin (4-in 4-out GPIO, switch signal, COM3~COM6, 5V VCC & GND)
	Audio	10-digit dip switch, COM2~6 RS232/485/422 selectable
Storage	Power	1*Line out, 1*MIC
	Power	DC9~36V power input, 1*DC aviation port, 1*2Pin Phoenix connector
Expansion	SATA	1*2.5" hard disk port
	MSATA	1*MSATA
OS Support	M.2	1*M.2/WiFi, support Key-E, 2230, WiFi module
	Windows	1*M.2/5G, support Key-B, 2242/52, 5G module
	Linux	Windows 7
Power Supply	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
	Power Type	External power supply
Environment	Voltage Input	DC 9V~36V
	Rate Consumption	36W~90W (based on CPU)
	Operating Temp.	-10°C ~ 50°C
	Storage Temp.	-20°C ~ 70°C
Environment	Relative Humidity	5%-95% relative humidity, non-condensing
	Vibration	0.5g rms/5-500HZ/random/operating

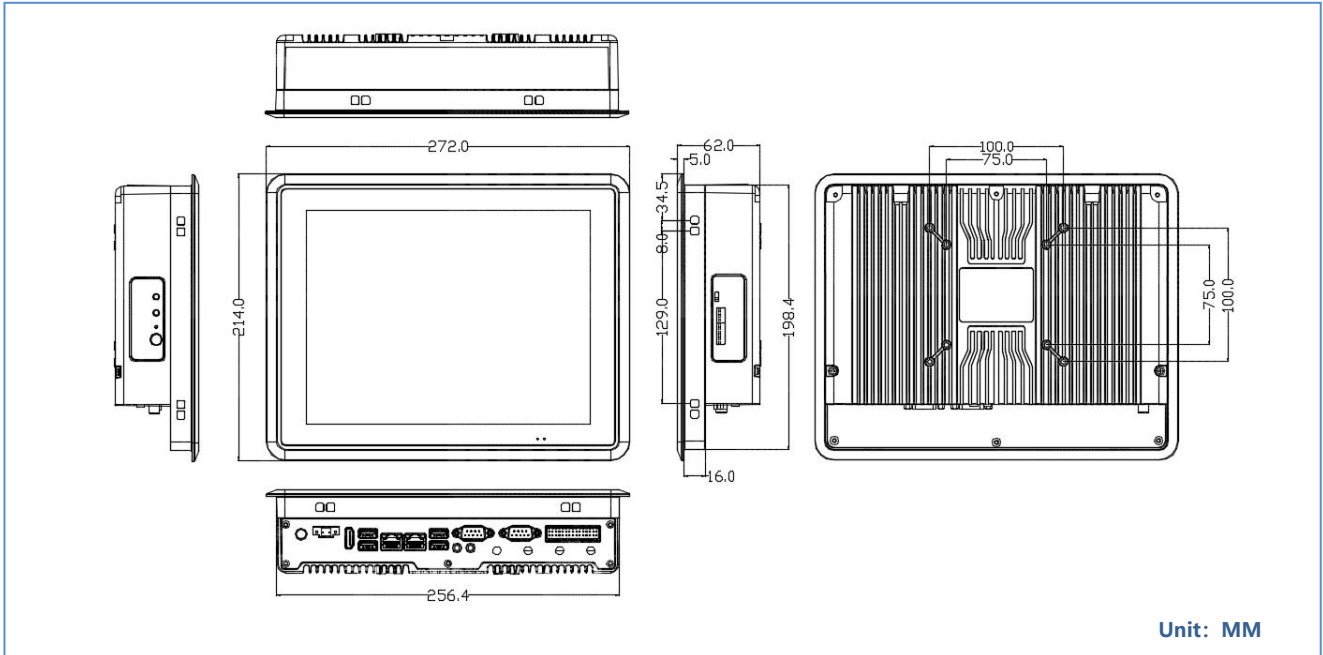

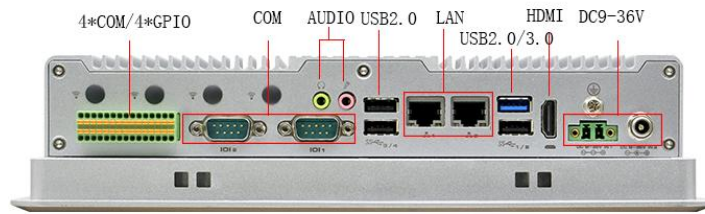

Button I/O View