

P1241Z-C6

**12.1" Wide Screen Fanless Panel PC,
1*LAN 6*COM, Capacitive Touch Screen**



Features

- 12.1" wide screen LCD , capacitive touch screen
- Onboard Intel®J4125/2.0GHz Quad Core processor
- 1*SODIMM DDR4 2400MHz, up to 8GB
- 1*HDMI , 1*VGA dual independent display
- 1*RTL8111H Gigabit Ethernet, support WOL、 PXE
- 6*RS232 (1*RS485), COM3~6 on Phoenix connector
- 1*USB3.0 , 5*USB2.0
- 9-36V wide voltage input
- Aluminum case, fanless design, IP65


Model No.	P1241Z-C6 V1.0 (J4125)	
Chassis	Material/Structure	Aluminum case, fanless design
	Color	Bright silver
	Dimension	L320*W233*H51mm
	Net Weight	2.6KG
	Installation	VESA / Embedded
LCD Screen	Type	12.1" LCD (wide screen)
	Resolution	1280 * 800
	Luminance cd/m2	500nits
Touch Screen	Type	Capacitive touch screen, Front Panel IP65
	Light Transmission	80%以上
Mainboard	CPU	>80%
	Graphics	Onboard Intel®Celeron J4125/2.0GHz quad Core 4-Threads processor, TDP 10W
	Memory	Intel®UHD Graphics 600
IO Port	POWER	1*Power Button , 1*ACLOSS(electric auto power ON/OFF)
	LED	1*Power LED , 1*HDD LED
	Display	1*VGA , 1*HDMI, support dual display
	LAN	1*RTL8111H Gigabit LAN port, support Wake On Lan/PXE
	USB	3*USB2.0 , 2* USB3.0
	COM	6*RS232, COM1/COM2 the 9th pin charged function, COM2 support RS232/485 , COM 3~6 on 2*8pin phenenix connector
	Phoenix Connector	2*8pin Phoenix connector (COM3~6/1*power LED/1* HDD LED/1*PWR button/1*Reset button signal)
	Audio	1*Line out, 1*MIC
Storage	SATA	1*2.5" SATA HDD port
	mSATA	1*MSATA slot, transfer speed up to 6Gbps
	Expansion Slot	Mini PCIE
OS Support	Microsoft Windows	Windows 7
	Linux	Ubuntu
Power Supply	Power Type	External power adaptor
	Voltage Input	DC 9-36V
Environment	Operating Temp.	-10°C ~ 50°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Vibration	0.5g rms/5-500HZ/random/operating



Industrial Panel PC

All product specifications are subject to change without prior notice

P1241Z-C6 Dimension

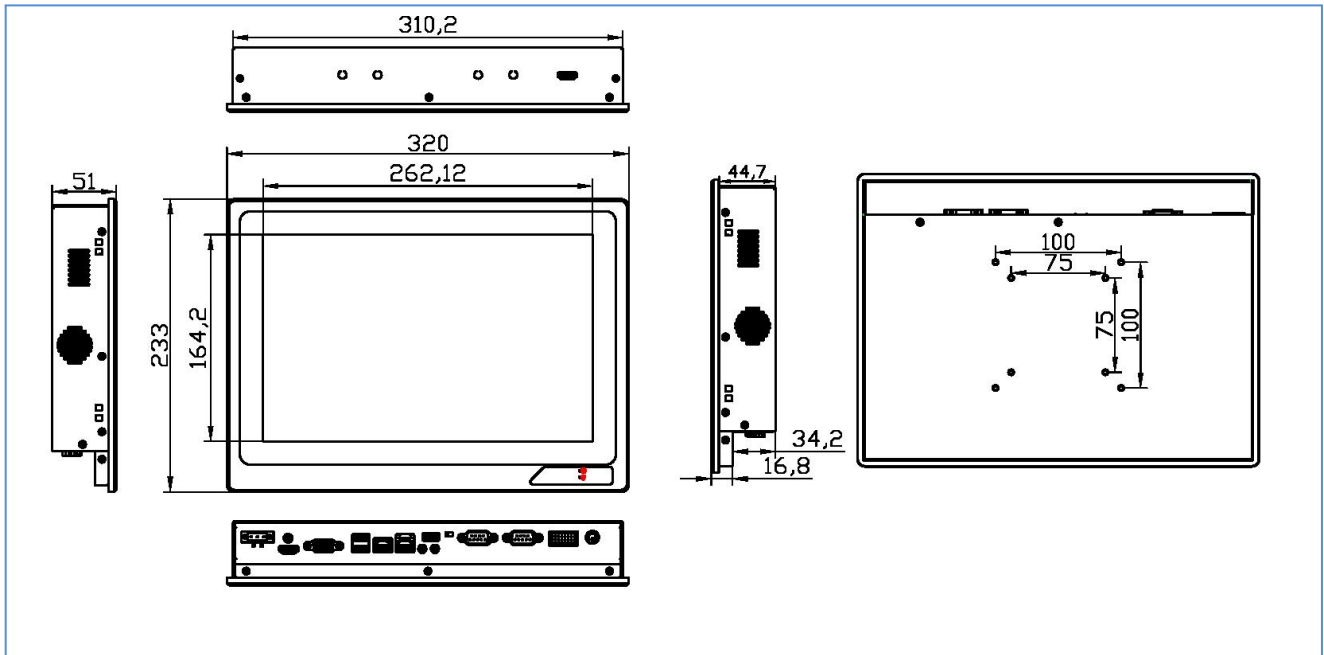


Front View



Rear View



Bottom I/O View

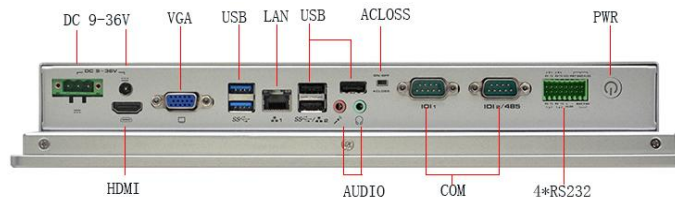

Order Information

No.	Model	CPU	Memory	Motherboard	MSATA	LAN	COM	HDMI	VGA	USB2.0	USB3.0	power
1	P1241Z-C6 V1.0(J1900)	J1900/2.00G	1*DDR3L	B190-D916E	1	1*8111H	6	1	1	4	1	9-36V
2	P1241Z-C6 V1.0(J4125)	J4125/2.00G	1*DDR4	B411-J116L	1	1*8111H	6	1	1	3	2	9-36V



Industrial Panel PC

All product specifications are subject to change without prior notice